






Remove the iWoc closing screw from the top tube and take the button away




Pull out the connection between iWoc and battery



Connect the battery connector to the corresponding one of the ANT+ conversion kit

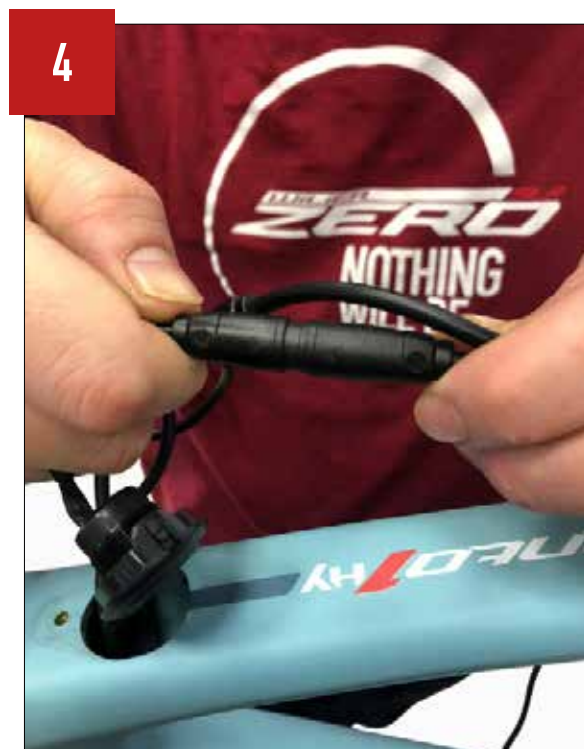

Connect the other connector of the ANT+ conversion kit to the iWoc button

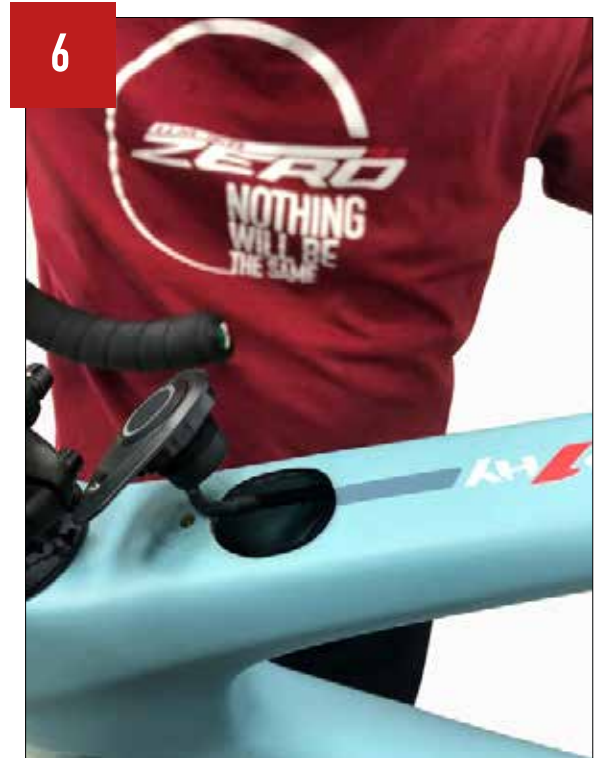

(5+6) Put all the connections inside the top tube. Use plastic material to wrap the connections, in order to avoid any noise



Place the iWoc button on the top tube and fix it with the closing screw